



PRO ESD INDIA PRIVATE LIMITED

ANSI ESD S20.20 2021 CERTIFIED

visit
www.proesd.in



ESD PLASTIC BOX

Color : Conductive black
Resistance range: 10^4 – 10^7 ohms
Standard Dim: 600X400X325MM
/600X400X125MM/600X400X280MM
Standard: ANSI ESD S20.20 2021&IEC



ESD PP CORRUGATED BOX

Color : Conductive black
Resistance range: 10^4 – 10^7 ohms
Dim: Customizable
Standard: ANSI ESD S20.20 2021 & IEC 61340-5-1



ESD FOAM TRAY

Color : Conductive black
Resistance range: 10^4 – 10^7 ohms
Dim: Customizable
Standard: ANSI ESD S20.20 2021 & IEC 61340-5-1



ESD PP CORRUGATED BOX WITH FOAM PARTITION

Color : Conductive black
Resistance range: 10^4 – 10^7 ohms
Dim: Customizable
Standard: ANSI ESD S20.20 2021 & IEC 61340-5-1



SB 1-C



SB 2-C



SB 3-C



SB 4-C



SB 5-C



SB 6-C



SB 7-C



SB 8-C



ESD L TYPE TRAY

DIM:270 x 210 x 95MM
No.of Slots: 25



ESD PP CORRUGATED SHEET

DIM:1300 x 2450MM
No.of Slots: 5MM

S.No	Outside Dimension (mm)			Inside Dimension (mm)		
	Length	Width	Height	Length	Width	Height
SB 1-C	125	100	60	117	80	52
SB 2-C	170	100	85	157	80	75
SB 3-C	220	130	125	200	115	115
SB 4-C	290	178	143	265	155	130
SB 5-C	290	363	145	265	340	130
SB 6-C	440	180	145	415	154	130
SB 7-C	435	425	215	405	380	208
SB 8-C	600	425	300	550	375	290

Suitable for packing electronic products which are sensitive to static. A structure that provides electrostatic discharge shielding.



PRO ESD INDIA PRIVATE LIMITED
ANSI ESD S20.20 2021 CERTIFIED



+91 79048 53916
+91 44 2265 4142



www.proesd.in/
Mail : sales@proesd.in



A2, 31/27, Sakthi Garden Phaseii,
No: 26/47, Senneer Kuppam,
Poonamallee, Chennai - 600056



PRO ESD INDIA PRIVATE LIMITED

ANSI ESD S20.20 2021 CERTIFIED

ESD WORKTABLE AND CHAIR



ESD CHAIR
TYPE: WITHOUT ARMREST AND FOOTRING
HEIGHT: ADJUSTABLE
WITH ESD CASTORS
MATERIAL: ESD LEATHER
GROUNDING CHAIN ATTACHED



MILD STEEL WORKTABLE
MATERIAL: MILD STEEL ESD
(POWDERED COATED)
DIM: CUSTOMISED
COLOR: MANSHEEL GREY
TABLE TOP: ESD LAMINATE/ESD MAT



ESD ALUMINIUM WORKSTATION
MATERIAL: ALUMINIUM
DIM: CUSTOMISED
COLOR: ALUMINIUM
TABLE TOP: ESD LAMINATE/ESD MAT



ESD SS WORKSTATION
MATERIAL: STAIN LESS STEEL
DIM: CUSTOMISED
COLOR: STEEL
TABLE TOP: ESD LAMINATE/ESD MAT



ESD TROLLEY AND RACK
MATERIAL: ESD PIPE
DIM: CUSTOMISED
COLOR: STEEL
ESD CASTORS
TABLE TOP: ESD LAMINATE/ESD MAT



ESD CHAIR
TYPE: WITH ARMREST AND FOOTRING
HEIGHT: ADJUSTABLE
WITH ESD CASTORS
MATERIAL: ESD LEATHER
GROUNDING CHAIN ATTACHED



ESD STOOL
TYPE: WITHOUT FOOTRING
WITH ESD CASTORS
HEIGHT: ADJUSTABLE
MATERIAL: ESD LEATHER
GROUNDING CHAIN ATTACHED



PRO ESD INDIA PRIVATE LIMITED

ANSI ESD S20.20 2021 CERTIFIED



www.proesd.in/
Mail : sales@proesd.in



+91 79048 53916
+91 44 2265 4142



A2, 31/27, Sakthi Garden Phase II,
No: 26/47, Senneer Kuppam,
Poonamallee, Chennai - 600056



PRO ESD INDIA PRIVATE LIMITED

ANSI ESD S20.20 2021 CERTIFIED

ESD GRID CURTAIN



SIZE:1.3X30MX0.3MM

SIZE:1.3X30MX0.5MM

**COMMON POINT
GROUND**



TYPE:FOUR PIN CONNECTOR

CORD LENGTH:2M

ESD TABLE MAT

DIM:1X10M&1.2X10M

MATERIAL:RUBBER

LAYER:TWO

THICKNESS:2MM

RESISTANCE

RANGE:10⁶-10⁹

STANDARD:

AS PER ANSI ESD S20.20 2021&IEC 61340-5-1

GROUNDING CHORD



COLOR:GREEN | Black

CORD LENGTH:1.9M

**TYPE:ALLIGATOR |
BANANA JACK**

STICKY MAT



SIZE:24"X36"

TOP COLOR:BLUE

ESD FLOOR MAT



DIM:2X15M

MATERIAL:VINYL

LAYER:THREE

THICKNESS:2MM

RESISTANCE RANGE:10⁶-10⁹

**STANDARD:AS PER ANSI ESD S20.20 2021 &
IEC 61340-5-1**

WRIST STRAP



TYPE:CROCODILE

WITH BANANA JACK

CORD LENGTH:0.9M


MAT BUTTON



SIZE:24"X36"

TOP COLOR:BLUE

ESD LAMINATE



COLOR:WHITE/GREY

DIM:1.2X2.4M

MATERIAL:WOOD

THICKNESS:0.7MM

RESISTANCE RANGE:10⁶-10⁹

**STANDARD:AS PER ANSI ESD S20.20 2021 &
IEC 61340-5-1**



PRO ESD INDIA PRIVATE LIMITED
ANSI ESD S20.20 2021 CERTIFIED



+91 79048 53916
+91 44 2265 4142



www.proesd.in/
Mail : sales@proesd.in



A2, 31/27, Sakthi Garden Phaseii,
No: 26/47, Senneer Kuppam,
Poonamallee, Chennai - 600056



PRO ESD INDIA PRIVATE LIMITED

ANSI ESD S20.20 2021 CERTIFIED



SURPA WRIST STRAP MONITOR

RESISTANCE MEASUREMENT RANGE: 800KΩ – 10MΩ

TEMPERATURE MEASUREMENT RANGE: 0°C – 50°C / 32°F – 122°F

MEASURING SURFACE: CONDUCTIVE, DISSIPATIVE ENVIRONMENTS

APPLICATION: ELECTRONIC INDUSTRY / ESD WORKSTATIONS

STANDARD AS PER: ANSI ESD S20.20 – 2021



ESD EMF METER

MATERIAL: Stainless Steel

MEASURING RANGE: 0.01 V/m to 100 kV/m

PRODUCT HEIGHT: Handheld / Adjustable Probe

FEATURE: Electromagnetic Field (EMF) Measurement for Electrostatic Discharge (ESD) Monitoring

APPLICATION: Electronic Industry, PCB Manufacturing, ESD-Sensitive Work Environments

STANDARD AS PER: ANSI/ESD S20.20 2021

DIGITAL SURFACE RESISTIVITY METER WITH ELECTRODE

RESISTANCE MEASUREMENT RANGE: 10^3 – 10^{12}

TEMPERATURE MEASUREMENT RANGE : 0°C–50°C/32°–122°F

MEASURING SURFACE : CONDUCTIVE, DISSIPATIVE, INSULATIVES

APPLICATION: ELECTRONIC INDUSTRY

STANDARD AS PER ANSI ESD S20.20 2021

ESD FOOTWEAR TESTER

MATERIAL: STAINLESS STEEL

MEASURING RANGE: $>10^9$ AND $<10^5$

PRODUCT HEIGHT: ADJUSTABLE

FEATURE: PERSONAL ELECTRONIC DISCHARGE

APPLICATION: ELECTRONIC INDUSTRY

STANDARD AS PER ANSI ESD S20.20 2021



SURFACE RESISTIVITY METER

RESISTANCE MEASUREMENT RANGE: 10^3 – 10^{12}

TEMPERATURE MEASUREMENT RANGE: 0° C–50° C/32–122°F

MEASURING SURFACE: CONDUCTIVE, DISSIPATIVE, INSULATIVES

STANDARD AS PER ANSI ESD S20.20 2021



PRO ESD INDIA PRIVATE LIMITED

ANSI ESD S20.20 2021 CERTIFIED



www.proesd.in/
Mail : sales@proesd.in



+91 79048 53916
+91 44 2265 4142



A2, 31/27, Sakthi Garden Phase II,
No: 26/47, Senneer Kuppam,
Poonamallee, Chennai - 600056



PRO ESD INDIA PRIVATE LIMITED
ANSI ESD S20.20 2021 CERTIFIED

GSTIN: 33AAPCP7482H1ZX | PAN Number: AAPCP7482H

Email: info@proesd.in | Website: www.proesd.in

ESD GLOVES



TOP FIT



PALM FIT



DOTTED



ESD APRON



ESD CAP



ESD SLIPPER



ESD SAFTY SHOE



ESD HEAL STRAP



ESD SHOE COVER



+91 79048 53916
+91 44 2265 4142



www.proesd.in/
Mail : sales@proesd.in



A2, 31/27, Sakthi Garden Phaseii,
No: 26/47, Senneer Kuppam,
Poonamallee, Chennai - 600056



PRO ESD INDIA PRIVATE LIMITED
ANSI ESD S20.20 2021 CERTIFIED

**SF No. 26/47, A2, 31/27, Sakthi
Garden Phase II, Senneerkuppam,
Chennai, Tiruvallur, 600056**
Mobile: 7904853916
GSTIN: 33AAPCP7482H1ZX
PAN Number: AAPCP7482H
Email: info@proesd.in
Website: www.proesd.in



ESD MAGNIFIER

LENSE:5X AND 10X
TYPE:CLAMP AND TABLE TOP



ESD FINGER COT

COLOR:PINK



ESD GRID TAPE

COLOR:BLACK
SIZE:2"X33M,2"X66M


ESD CAUTION TAPE

COLOR: YELLOW
SIZE:2"X25M



ESD TILE

DIM:600X600MM
COLOR: WHITE WITH GREY
MAT THICKNESS:2MM
USAGE:ELECTRONICS

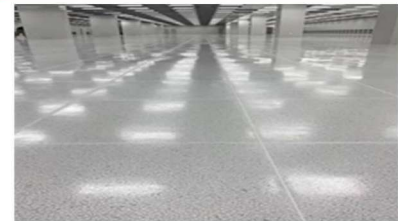

ESD FLOOR WAXING

PACKING TYPE:CAN
MOQ:100 SQFT
Dissipative floor wax is suitable for vinyl, li-noleum, ceramic tiles.



SINGLE FAN IONISIER

TYPE:TABLE TOP
USAGE:FOR
NETURLIZING ION
COVERAGE
AREA:500MM
USED IN ELECTRONIC
INDUSTRIES



TWO FAN IONISIER

TYPE:OVERHEAD
USAGE: FOR NATURALISING ION
COVERAGE:1M
USED IN ELECTRONIC INDUSTRIES



THREE FAN IONISIER

TYPE:OVERHEAD
USAGE: FOR NATURALISING ION
COVERAGE:1M
USED IN ELECTRONIC INDUSTRIES



IONIZING AIR BLOWER


TYPE: AIR BLOWER
USAGE: NEUTRALIZATION & PARTICLE
CONTROL
COVERAGE AREA: 1M
USED IN ELECTRONIC INDUSTRIES



COPPER FOIL
SIZE:12MMX500M

COPPER TAPE
SIZE:12MMX25M AND
24MMX25M

STATIC DISCHARGE PALM PLATE



ESD TWEEZERS

COLOR:BLACK
TYPE: PLASTIC & METAL



ESD DOCUMENT FOLDER

COLOR:TRANSPARENT
TYPE:A3 AND A4



ESD MAT

COLOR: BLUE
MAT THICKNESS:2MM
USAGE:ELECTRONICS



ESD EPOXY FLOORING

THICKNESS:1-10MM
COLOR:ANY
USAGE: ELECTRONICS